



## INSTALLATION MANUAL

### Log Sets

For installation in 345-DVTE31LN-1  
(see the Installation, Operation, and  
Maintenance Manual included with the fireplace)



#### MODELS:

**31-LS-GT**

**Grand Timber**

**31-LS-WW**

**Weathered Wood**

After removing the parts from packaging, inspect them to ensure that no damage has occurred. Please report any damage immediately to your authorized Archgard dealer.

#### IMPORTANT

Please review and understand the information in this manual in full PRIOR to beginning your installation.

**WARNING:** If the information in this manual is not followed exactly, a fire or explosion may result causing property damage, personal injury or loss of life.

Do not store or use gasoline or other flammable vapors or liquids in the vicinity of this or any other appliance.

#### WHAT TO DO IF YOU SMELL GAS:

- Do not try to light any appliance
- Do not touch any electrical switch; do not use any phone in your building
- Immediately call your gas supplier from a neighbors phone.
- Follow the gas suppliers instructions
- If you can not reach your gas supplier, call the fire department

Installation and service must be performed by a qualified installer, service agency or the gas supplier.

**Only kits supplied by the manufacturer may be used.**

#### **INSTALLER:**

LEAVE THIS MANUAL WITH THE APPLIANCE.

#### **CONSUMER:**

RETAIN THIS MANUAL FOR FUTURE REFERENCE.

#### **ARCHGARD FIREPLACE PRODUCTS**

7116 Beatty Drive  
Mission, BC V2V 6B4 Canada

English and French Installation Manuals available through your local dealer or visit our website at:

**[www.archgard.com](http://www.archgard.com)**

Les manuels d'installation en anglais et en français son disponibles chez votre détaillant local ou en visitant notre site web: **[www.archgard.com](http://www.archgard.com)**

200-3346-01  
August 7, 2020

# Installation

## Overview

The Archgard pan burner bed and fiber logs are designed to give a realistic fire package, and created to look the same as the day they were originally installed even after many years of use. Care must be given when first installing the logs, and if removed for servicing, as they can be damaged or broken if not handled properly.

After opening the log set package, inspect the logs to ensure that no damage has occurred inside the package. Please report any damage immediately to your Authorized Archgard Dealer.

Gas and vent connection must be made before installing the embers and logs on the pan burner.

**CAUTION:** DO NOT block pilot opening with embers or glass media material.

**NOTE:** Improper placement of logs and embers may cause soot accumulation on the internal parts and glass. This is not covered under warranty. Do not use broken or damaged logs.

Many of the logs use the locator pins located on the burner to position the logs. There are holes in the bottom of the log to help align them to the unique position on the burner.

**IMPORTANT:** Embers should be placed so as not to completely block burner ports.

## Locator Pins

**NOTE:** Installing the fiber logs in any other position other than shown will result in flame impingement causing sooting of the logs, brick liner and ceramic glass viewing area.

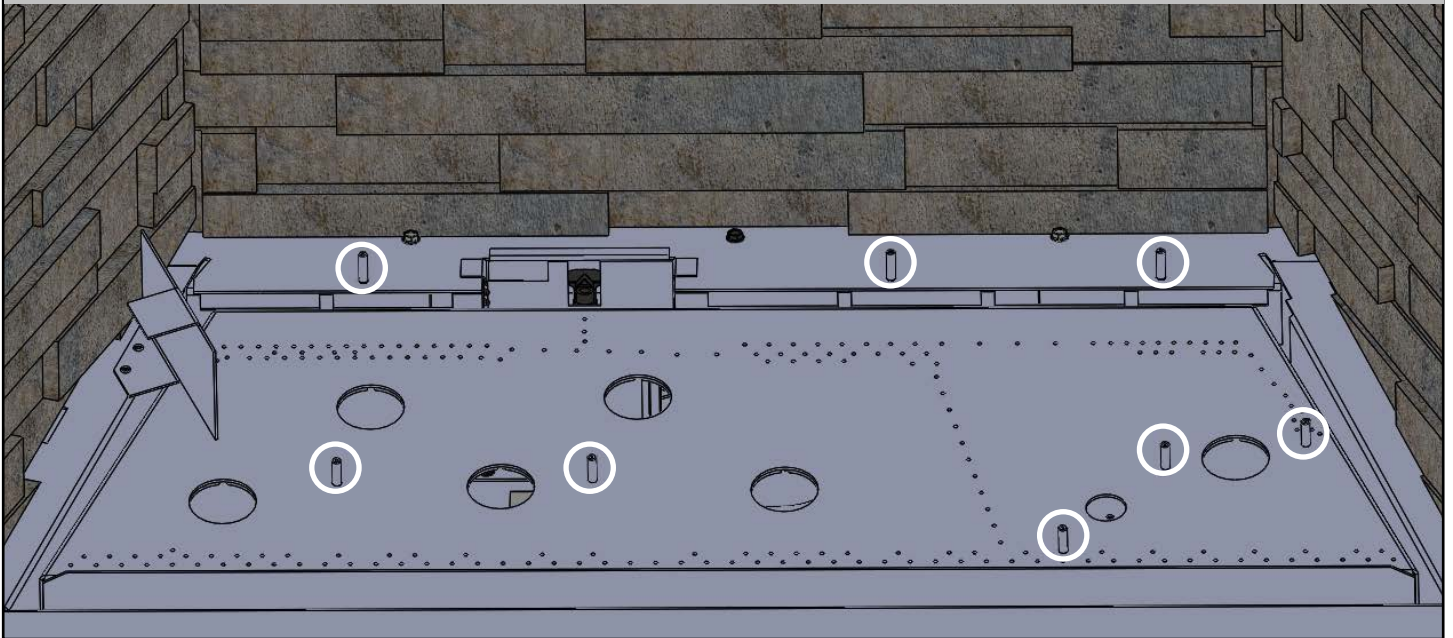


Figure 01:

## WARNING

Failure to position the parts in accordance with these diagrams or failure to use only parts specifically approved with this appliance may result in property damage or personal injury.



## Grand Timber Log Set (345-DVTE31LN-1)

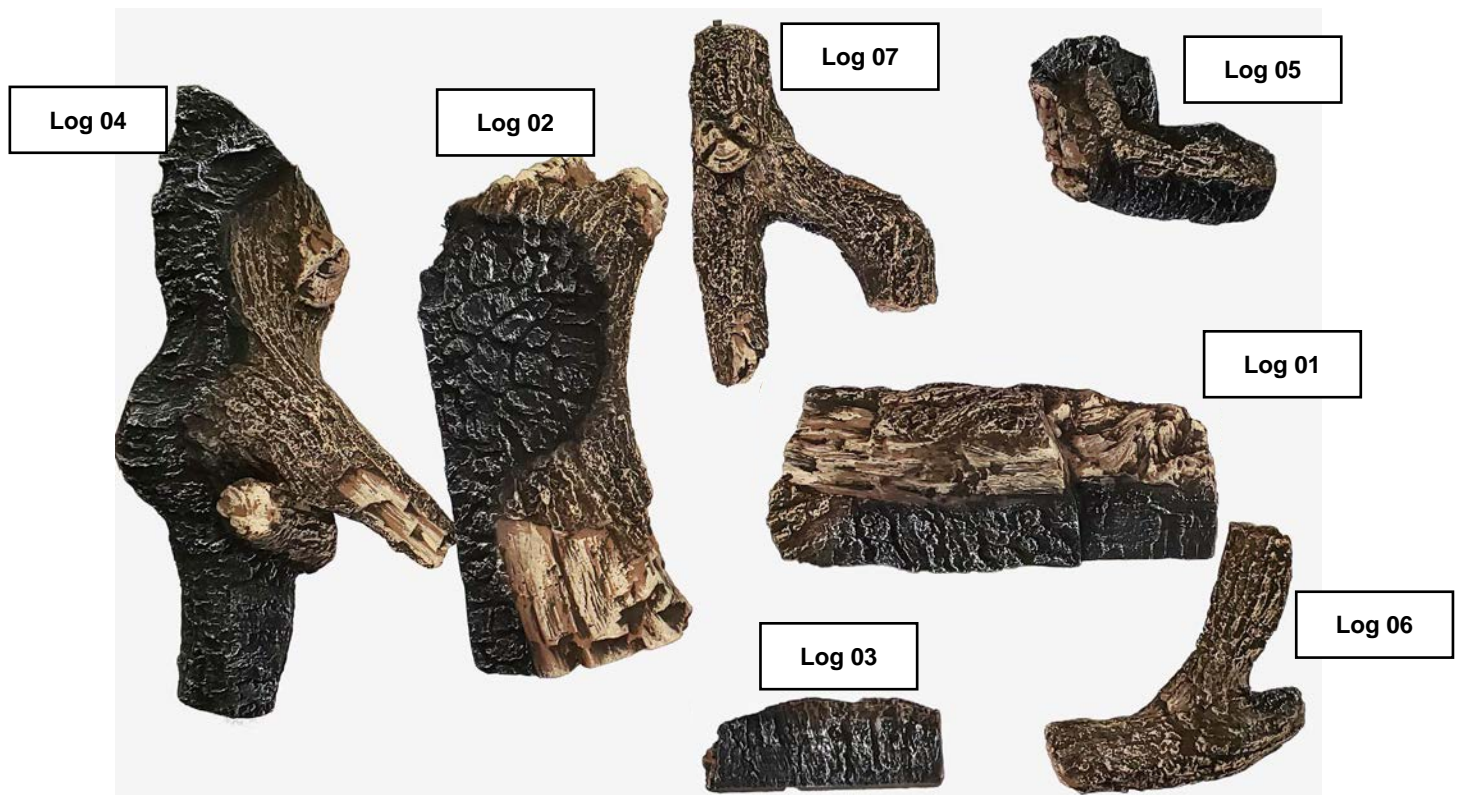


Figure 02:

**Step 1:** Place **Log 01** on the pin the left, rear corner of the firebox.



Figure 03:



Figure 04:

# Installation

**Step 2:** Place **Log 02** on other two pins in the back of the firebox.



Figure 05:

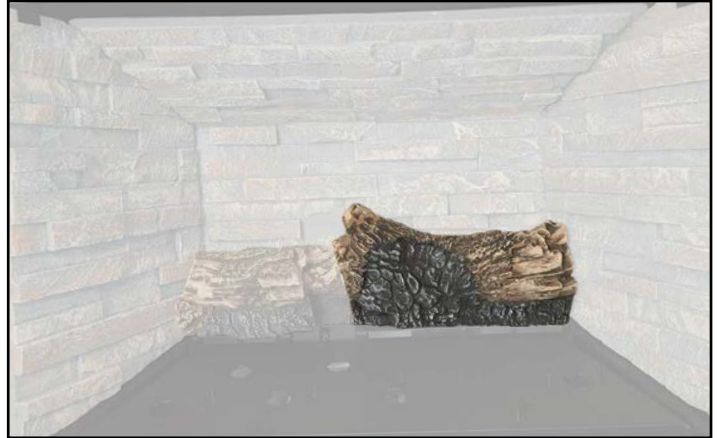


Figure 06:

**Step 3:** Install the log bracket in the holes on the left side of the burner using the two (2) black tek screws included in the manual bag.

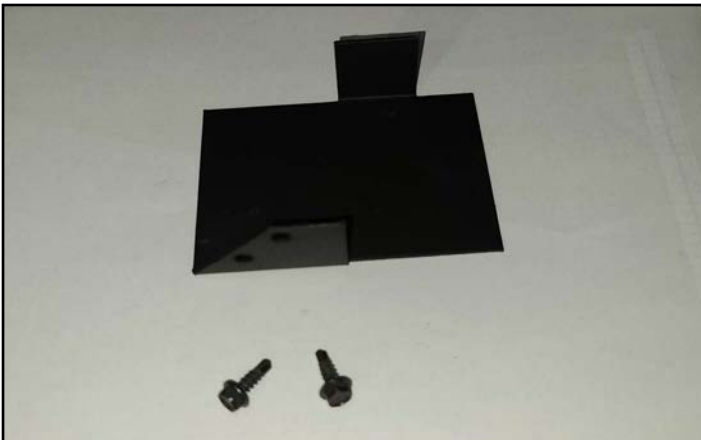


Figure 07:



Figure 08:

**Step 4:** Spread some embers along the back side of the burner. Do not place embers with a flat edge down as it may block burner ports.

Keep the embers away from the pilot opening. Do NOT block the ports immediately in front of the pilot.

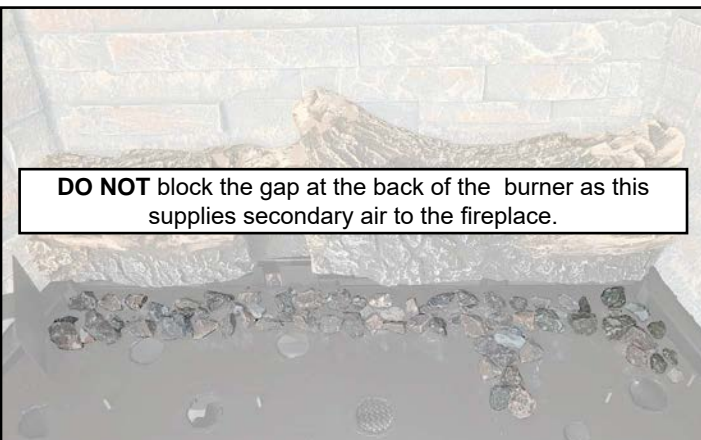


Figure 09:



Figure 10:



# Installation

**Step 5:** Place **Log 04** toward the left side of the firebox, using the two pins for alignment.



Figure 11:



Figure 12:

**Step 6:** Place **Log 05** on the pin to the right of Log 03. After it's placed, rotate the log until it contacts the pin on the right side of the burner.



Figure 13:

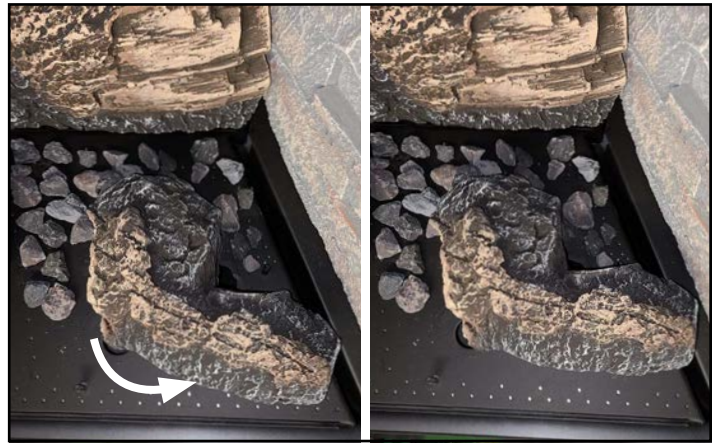


Figure 14:

Log 05 in place.

**Step 7:** Spread some embers along the front of the burner. Leave some space where Log 07 will rest. Do not place embers with a flat edge down as it may block burner ports.

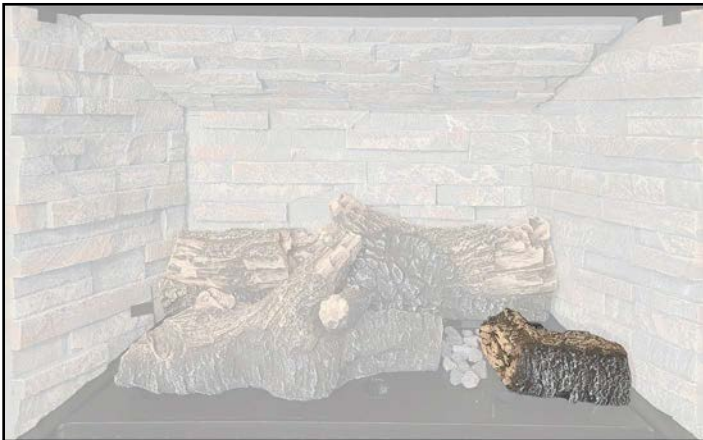


Figure 15:



Figure 16:



# Installation

The port with screen mesh may be covered with embers - ensure the entire port is not blocked.



Figure 17:

**Step 8:** Place the end of **Log 07** on the pin at the front of the burner. The top of Log 05 will rest on Log 02 and Log 04.



Figure 18:



Figure 19:

**Step 9:** Add embers around the bottom of Log 07.



Figure 20:



# Installation

**Step 10: Log 06 rests on Log 01 and Log 03.**

Log 06 in place.



Figure 21:



Figure 22:

**Step 11: Log 03 rests on Log 02 and Log 04.**

Log 03 in place.



Figure 23:



Figure 24:

## Platinum Ember Placement

**Step 1:** Remove embers from the bag. Be sure to follow handling instructions on the bag. Separate embers by pulling apart. Embers may be flattened or separated into smaller pieces to achieve any desired look.

**Step 2:** Place the embers randomly throughout the fire bed, taking care to avoid burner openings.



Figure 25:



Figure 26:

Platinum embers provide a brighter glow than the black embers. When using a mixture of both the firebox will be filled with a natural glow. **Note:** DO NOT block burner openings with platinum embers or any other material.



## Grand Timber Logset Overview

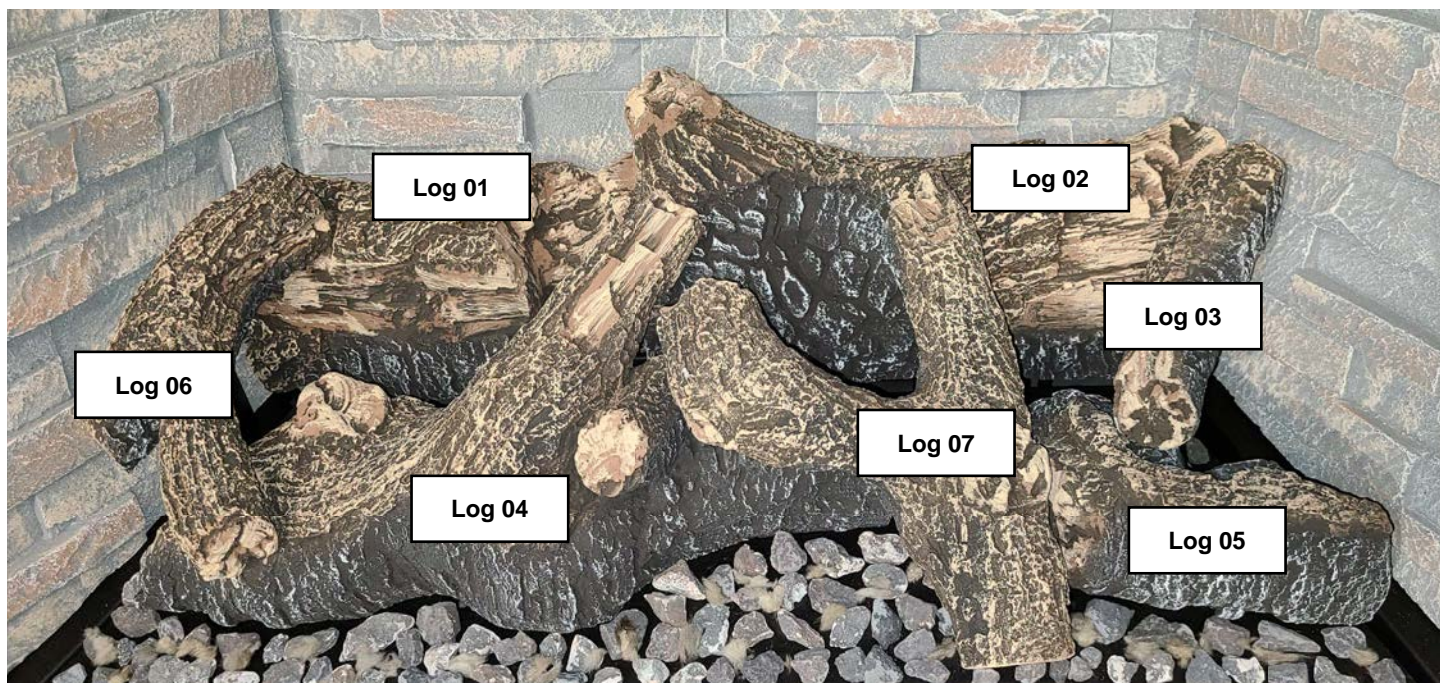


Figure 27:

Part #	Item Description	Qty	Part #	Item Description	Qty
31-LS-GT	Log Set	1 Set	31-LS-GT-5	Log 5	1
31-LS-GT-1	Log 1	1	31-LS-GT-7	Log 7	1
31-LS-GT-2	Log 2	1	31-LS-GT-6	Log 6	1
31-LS-GT-3	Log 3	1	310-0020	Black Embers (2 cup bag)	1
31-LS-GT-4	Log 4	1	310-0019	Platinum Embers (1 bag)	1

### WARNING

Never use unapproved burner media such as rock wool or similar material. The use of unapproved burner media may cause damage or injury and will void product warranty.



## Weathered Wood Log Set (345-DVTE31LN-1)



Figure 28:

**Step 1:** Place **Log 01** on the pin the left, rear corner of the firebox.



Figure 29:



Figure 30:

# Installation

**Step 2:** Place **Log 02** on other two pins in the back of the firebox.



Figure 31:



Figure 32:

**Step 3:** Install the log bracket in the holes on the left side of the burner using the two (2) black tek screws included in the manual bag.

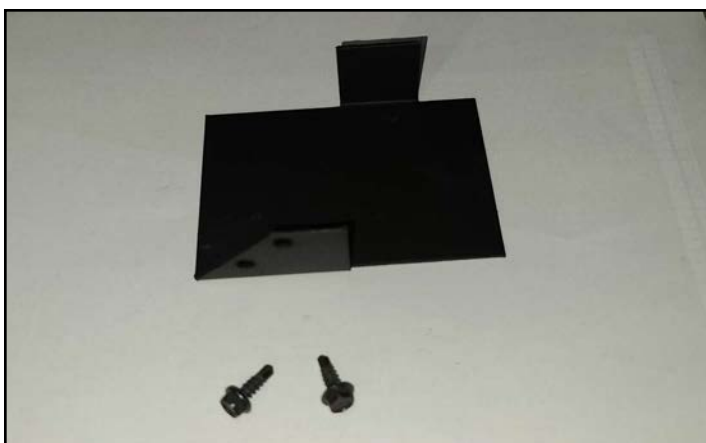


Figure 33:



Figure 34:

**Step 4:** Spread some embers along the back side of the burner. Do not place embers with a flat edge down as it may block burner ports.

Keep the embers away from the pilot opening.



Figure 35:



Figure 36:




# Installation

**Step 5:** Place **Log 04** on the two pins on the left side of the burner.



**Figure 37:**

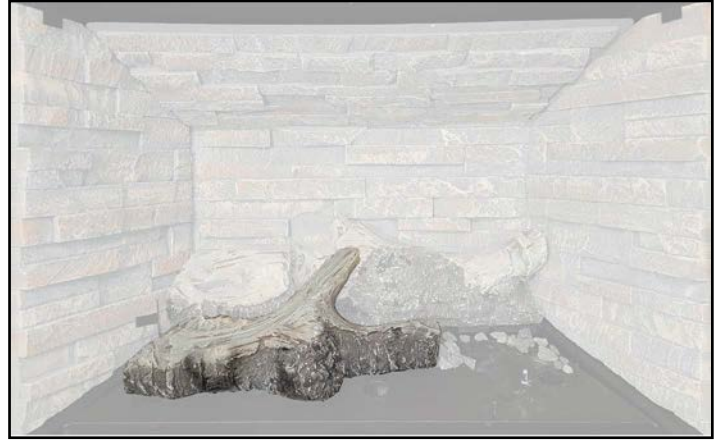

**Figure 38:**

**Step 7:** **Log 05** will have multiple holes on the bottom. Use the hole highlighted in **Figure 39**.



**Figure 39:**

**Step 8:** Place Log 05 on the right side of the burner.



**Figure 40:**

**Step 9:** Twist Log 05 until the right side contacts the pin in the right side of the burner.



**Figure 41:**

Log 05 in place.



**Figure 42:**



# Installation

**Step 10:** Place some embers along the front of the burner. Do not place embers with a flat edge down as it may block burner ports.



Figure 43:

The port with screen mesh may be covered with embers - ensure the entire port is not blocked.



Figure 44:

**Step 11:** Place the end of **Log 07** on the pin at the front of the burner. The top of Log 05 will rest on Log 02 and Log 04.



Figure 45:



Figure 46:

**Step 12:** Add embers around the bottom of Log 07.



Figure 47:



# Installation

**Step 13: Log 06 rests on Log 01 and Log 04.**

Log 06 in place.



Figure 48:

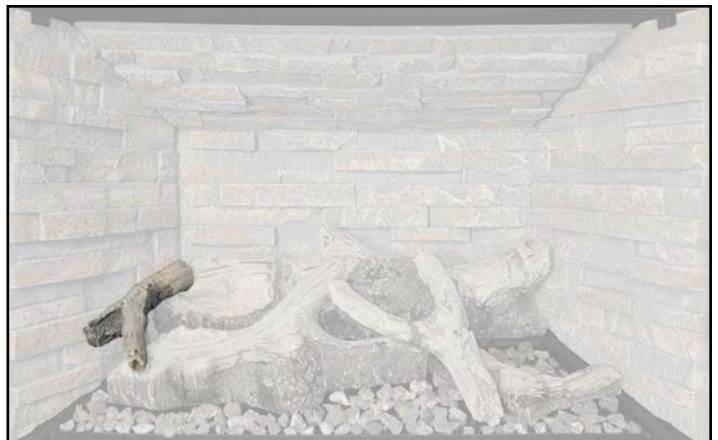


Figure 49:

**Step 14: Log 03 rests on Log 02 and the right side of the burner.**

Log 03 in place.



Figure 50:

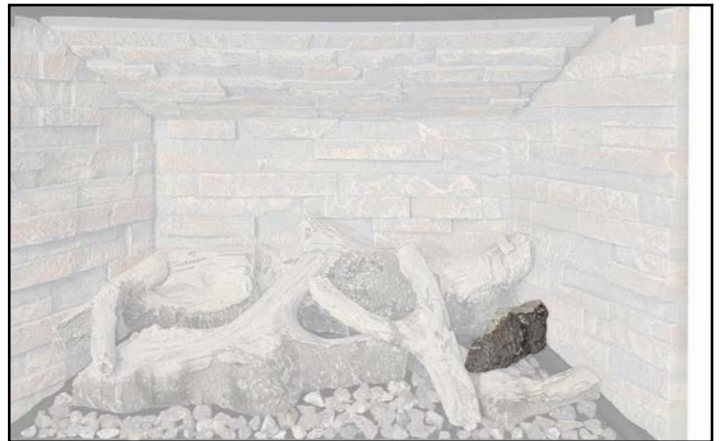


Figure 51:

## Platinum Ember Placement

**Step 1:** Remove embers from the bag. Be sure to follow handling instructions on the bag. Separate embers by pulling apart. Embers may be flattened or separated into smaller pieces to achieve any desired look.

**Step 2:** Place the embers randomly throughout the fire bed, taking care to avoid burner openings.



Figure 52:



Figure 53:

Platinum embers provide a brighter glow than the black embers. When using a mixture of both the firebox will be filled with a natural glow. **Note:** DO NOT block burner openings with platinum embers or any other material.



## Weathered Wood Logset Overview

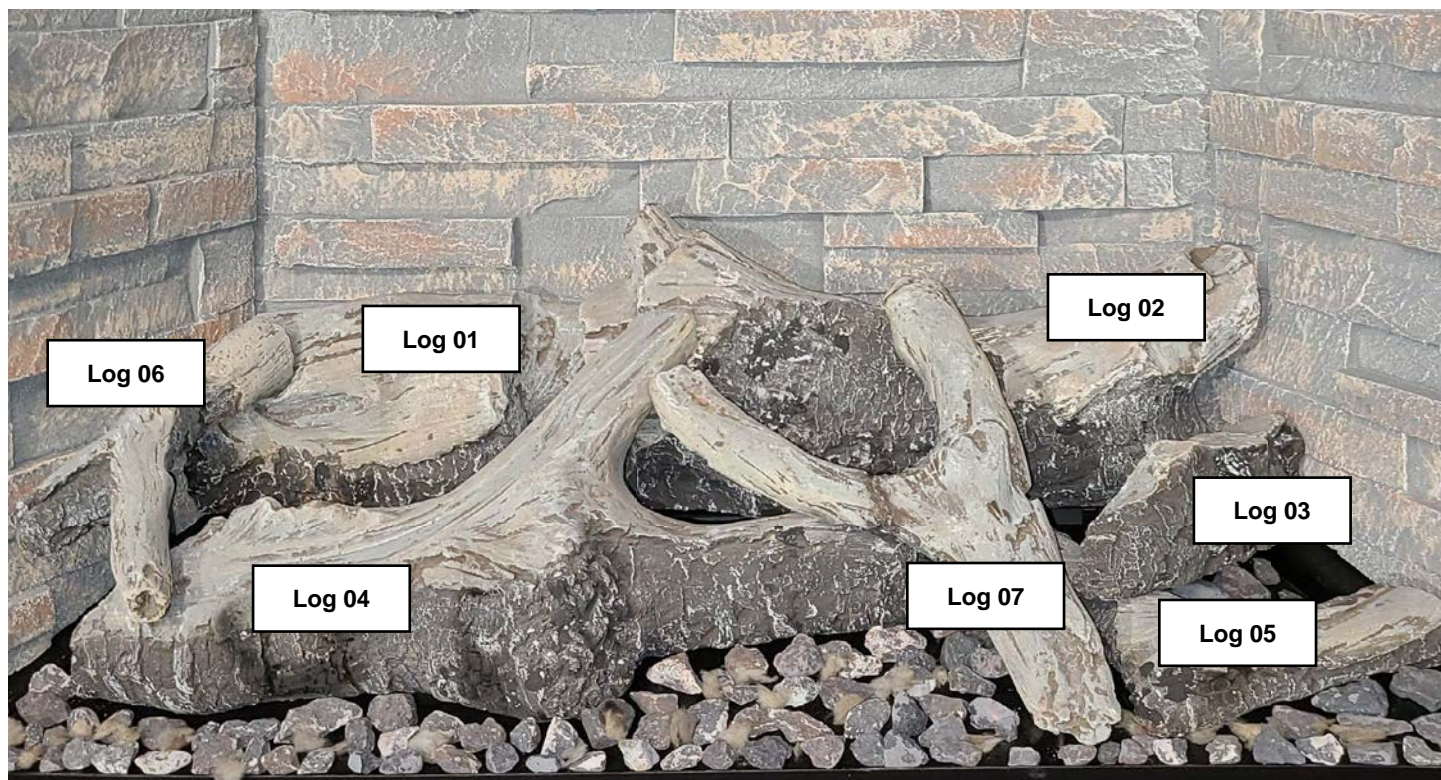


Figure 54:

Part #	Item Description	Qty	Part #	Item Description	Qty
31-LS-WW	Log Set	1 Set	31-LS-WW-5	Log 5	1
31-LS-WW-1	Log 1	1	31-LS-WW-6	Log 6	1
31-LS-WW-2	Log 2	1	31-LS-WW-7	Log 7	1
31-LS-WW-3	Log 3	1	310-0020	Black Embers (2 cup bag)	1
31-LS-WW-4	Log 4	1	310-0019	Platinum Embers (1 bag)	1

### WARNING

Never use unapproved burner media such as rock wool or similar material. The use of unapproved burner media may cause damage or injury and will void product warranty.



## NOTES

[illegible]

**ARCHGARD INDUSTRIES LTD.**

7116 BEATTY DRIVE  
MISSION, B.C. V2V 6B4  
CANADA

WEBSITE: [WWW.ARCHGARD.COM](http://WWW.ARCHGARD.COM)