

CONTENTS



The story of Archgard and the inspiration of heating	3
Products	
72-DVT30N-2 & 72-DVTE30N-2	4
3400-DVTR20N-3	6
Technical Information	8
Accessories	10



THE STORY OF ARCHGARD AND THE INSPIRATION OF HEATING

INSPIRATION

Fire has played a vital role throughout history, ensuring our survival. The fireplace has always held a special place in the hearts and homes in North America. It is the focal point of the home and provides the heat, light, and security we all need – especially during those cold winters and long nights with heavy snowfall and icy winds.



DRIVE

Passion has been the drive behind every fireplace Archgard has built since it was established over 30 years ago. Quality, modern technology, and design has been our recipe for success. Quality was our promise then, and quality is our promise today. Our fireplaces combine old traditions with modern functionality. We create products that give you the same feeling you get while sitting in front of a traditional wood burning fireplace yet satisfies even the most stringent demands for clean combustion. This all leads to the Archgard experience: enjoy your unparalleled flame with a clear conscience.

AND SO MUCH MORE....

The fireplace is no longer simply a source for heat but rather a central part of our homes. Our fireplaces are designed with clean lines and a focus on providing a perfect flame. We offer a wide range of products and accessories to meet any personal tastes. The result of our endeavors are timeless classics that form a natural gathering point in modern homes.

72-DVT30N-2 & 72-DVTE30N-2+

Ignition Type:

72-DVT30N-2 - Millivolt Ignition (USA Only) 72-DVTE30N-2 - Electronic Ignition (USA or Canada)

Fireplace Dimensions:

38"(965mm) W x 31"(787mm) H x 16-1/4"(412mm) D*

SPECIFICATIONS

Input Rating			
Natural Gas	20,100-30,000 BTU/hr 5.9-8.8 kW/hr		
Propane	23,000-30,000 BTU/hr 6.7-8.8 kW/hr		
Efficiencies			
Steady State	68.49%		
P.4 fireplace Efficiency	68.45%		

FIREBRICK OPTIONS



72-BRPL-QCG /Brick Panel,
Québec City Grey



72-BRPL-QCR /Brick Panel,
Québec City Red



72-BRPL-RG /Eternal Flame Reflective
Ceramic Glass

For more information, pictures, and videos visit www.archgard.com

- * See the manual for more information.
- $\star\star$ All units come standard with barrier screens which attach to the door with very little effort.
- + Available with Electronic Ignition or Millivolt Ignition (USA Only).



Relax and let your Archgard fireplace warm your home on those cold nights when you need it the most. The German engineered silent direct drive heat distribution fans will provide the warmth you need faster and farther than natural convection.





3400-DVTR20N-3+

Ignition Type:

Millivolt Ignition (USA Only)

Fireplace Dimensions:

34-5/8"(863mm) W x 30"(762mm) H x 15-3/4"(381 mm) D*

SPECIFICATIONS

Input Rating		
Natural Gas	13,000-20,000 BTU/hr 3.8-5.8 kW/hr	
Propane 15,000-20,00 BTU/hr 4.4-5.8 kW/hr		
Efficiencies		
Steady State	61.94%	
P.4 fireplace Efficiency	54.54%	

FIREBRICK OPTIONS



3400-BRPL-QCG / Brick Panel, Québec City Grey



3400-BRPL-QCR /Brick Panel,
Québec City Red



3400-BRPL-RG / Eternal Flame Reflective Ceramic Glass

For more information, pictures, and videos visit archgard.com $\,$

- * See the manual for more information.
- ${}^{**}\,\text{All fireplaces come standard with barrier screens which attach to the door with very little effort.}$
- + Top or rear vent.



Quality, Design, and Dependability are at the core of every Archgard fireplace. The affordable 3400-DVTR20N is no exception. This 20,000 BTU heater rated direct vent gas fireplace will fit any budget. Customize your fireplace by adding optional variable speed heat distribution fans, Quebec City Grey or Quebec City Red brick panels, or or the robust Eternal Flame Reflective Ceramic Glass.

Household Refinement

Whether building a new home or improving your existing home, the 3400-DVTR20N will exceed your expectations and become the focal point of any room.







Technical Specifications

	72-DVT30N-2	72-DVTE30N-2	3400-DVTR20N-3		
Ignition Type	Millivolt	Electronic Ignition	Millivolt		
Availability	USA Only	USA or Canada	USA Only		
Natural Gas Input Rating		000 BTU/hr 3 kW/hr	13,000-20,000 BTU/hr 3.8-5.8 kW/hr		
Propane Input Ranting		,000 BTU/hr 8 kW/hr	15,000-20,000 BTU/hr 4.4-5.8 kW/hr		
	Effi	ciencies			
Steady State	65.	94%	61.94%		
P4 Fireplace Efficiency	65.	94%	54.54%		
	Dim	nensions			
Framing dimensions	38" H x 38" W x 16-1/4" D		31" H x 34-3/4" W x 16" D		
Viewing Area	H 15.5" xW 29"		H 14.5"x W 26.75"		
Vent Size	4 x 7" flex or approved 6 5/8" rigid				
Fireplace Vent Exit location	Top exit		Top or rear exit		
Clearance to Combustibles					
Mantle Clearance	45" from bottom of unit to bottom of 6" mantle		35" from bottom of unit to bottom of 6" mantle		
Sidewall Clearance	1" from faceplate to interior sidewall.				
	Standard Features				
Glass Type	Shatter-resistant Ceramic Glass				
Burner Type	Panoramic wall-to-wall steel pan				
Firebox Construction	Welded, double-seal rivet and gasket, silicone free. Constructed of 16 and 18 gauge galvanized and aluminized coated steel for long life and durability.				
Warranty options	Archgard's Worry-Free Elite Limited Lifetime				
Convection Fan	Included Op		Optional		
Propane Conversion Kit	Optional				

LOUVERS



Louver Kit, Brushed Nickel



Louver Kit, Alternating Brushed Nickel and Black



Louver Kit, Black



Louver Kit, Alternating Gold tone and Black

INSETS



Inset Kit, Gold




Inset Kit, Brushed Nickel




Inset Kit, Black

TECHNICAL DIMENSIONS


TOP VIEW



SIDE VIEW



CORNER FRAMING

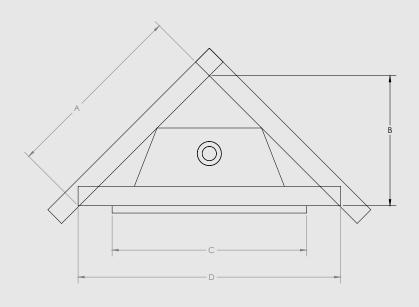

72-DVT30N-2 & 72-DVTE30N-2 (TOP VENT ONLY)

А	В	С	D
38"	21-1/2"	16-1/4"	6-1/2"
965mm	545mm	412mm	164mm
Е	F	G	Н
31"	38"	29-3/4"	N/A

3400-DVTR20N-3 (TOP & REAR VENT)

А	В	С	D
34-5/8"	23-1/2"	15-3/4"	6-3/4"
864mm	584mm	381mm	152mm
Е	F	G	Н
29"	30"	27-1/2"	21-1/2"
737mm	762mm	686mm	508 mm

72-DVT30N-2 & 72-DVTE30N-2

А	В	С	D
39-1/8"	27-5/8"	38"	55-1/4"
994mm	686mm	965mm	1403mm

3400-DVTR20N-3

А	В	С	D
*39-1/2"	28"	34-3/4"	46.75"
991mm	711mm	864mm	1187mm

*This measurement allows for 6" sidewall clearance on sides of unit (required).













FRONTS & DOORS

	Forged Iron Front Square FIFSB / FIFSP	Forged Iron Front Arch FIFAB / FIFAP	Wrought Iron Front Arch WIFASDB / WIFASDP
FOR MODEL 72	36"h x 42"w	36"h x 42" w x 32 % " to shoulder	
	B P	Single door B P	
FOR MODEL 3400	~33 ½"h x 40 ½"w	~33 1⁄2"h x 40 1⁄2"w x 30 1⁄2" to shoulder	
	В	B P	















	Door Arch 72-DAHVBL	Forged Iron Front Square Bow 72-FIFSBOW2DB* / 72-FIFSBOW2DP*	Eclipse Front 72-FSEB
FOR MODEL 72	~34 % "h x 39 ½ " w x 32" to shoulder	*35 ½ ″h x 42″w	*31 ¹⁵ / ₁₆ "h x 29"w
	Hemlock Valley B	*Bow, Double door B P	B







For more information, pictures, and videos visit archgard.com

- * See the manual for more information.
 ** All units come standard with barrier screens which attach to the door with very little effort.

Find us on:







YouTube

Instagram



