
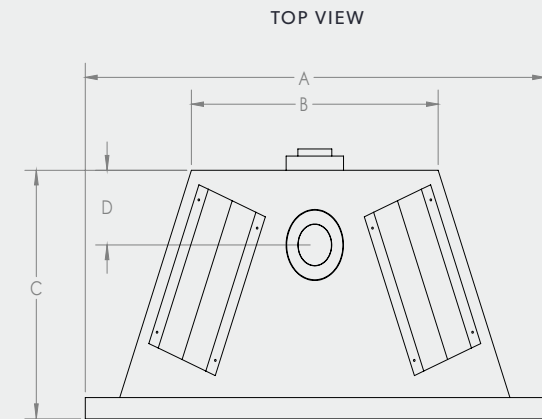


TECHNICAL DIMENSIONS

TECHNICAL SPECIFICATIONS

72 DVT30N	
Natural Gas Input Rating	20,100-30,000 BTU/hr 5.9-8.8 kW/hr
Propane Input Rating	23,000-30,000 BTU/hr 6.7-8.18 kW/hr
Efficiencies	
Steady State	86%
AFUE Efficiency	74%
P4	62.75%
Minimum Fireplace Opening	
Framing dimensions	38" H x 38" W x 16-1/4" D
Viewing Area	H 15.5" x W 29"
	4 x 7" flex or approved 6 5/8" rigid
Vent Exit location on unit	Top exit
Clearance to Combustibles	
Mantle Clearance	45" from bottom of unit to bottom of 6" mantle
Standard Features	
Ceramic Glass	Included
Burner Type	Wall to wall steel pan with Elite Lifetime Warranty
Firebox Construction	Welded/Rivet and Gasket silicone free
Warranty options	Elite Limited Lifetime
Fan Kit	Included
Propane conversion kit	Optional

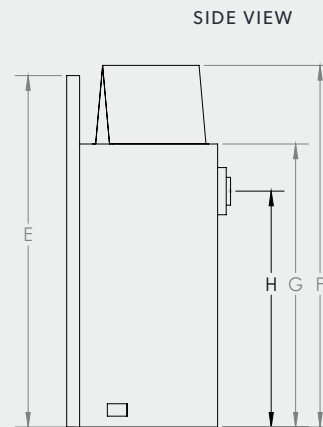


72 DVT30N (TOP VENT ONLY)

A	B	C	D
38"	21-1/2"	16-1/4"	6-1/2"
965mm	545mm	412mm	164mm
E	F	G	H
31"	38"	29-3/4"	N/A
787mm	965mm	756mm	N/A

72 DVT30N

A	B	C	D
39-1/8"	27-5/8"	38"	55-1/4"
994mm	686mm	965mm	1403mm

CORNER FRAMING

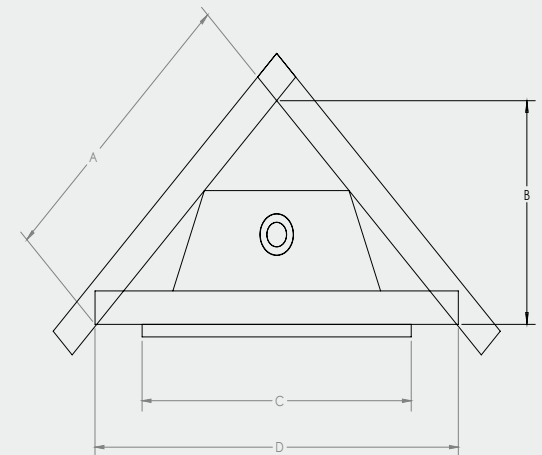

Tested and Approved to North America Standards ANSI Z21.88B-2014/CSA 2.33-2014 and CAN/ CGA-2.17-M91