


TECHNICAL DIMENSIONS

TECHNICAL SPECIFICATIONS

3400 DVTR20N	
Natural Gas Input Rating	13,000-20,000 BTU/hr 3.8-5.8 kW/hr
Propane Input Rating	15,000-20,000 BTU/hr 4.4-5.8 kW/hr
Efficiencies	
Steady State	86%
AFUE Efficiency	78%
P4	61.94%
Minimum Fireplace Opening	
Framing dimensions	31" H x 34-3/4" W x 16" D
Viewing Area	H 16.5" x W 32.4"
	4 x 7" flex or approved 6 5/8" rigid
Vent Exit location on unit	Top or rear exit
Clearance to Combustibles	
Mantle Clearance	35" from bottom of unit to bottom of 6" mantle
Standard Features	
Ceramic Glass	Included
Burner Type	Wall to wall steel pan with Elite Lifetime Warranty
Firebox Construction	Welded/Rivet and Gasket silicone free
Warranty options	Elite Limited Lifetime
Fan Kit	Included
Propane conversion kit	Optional

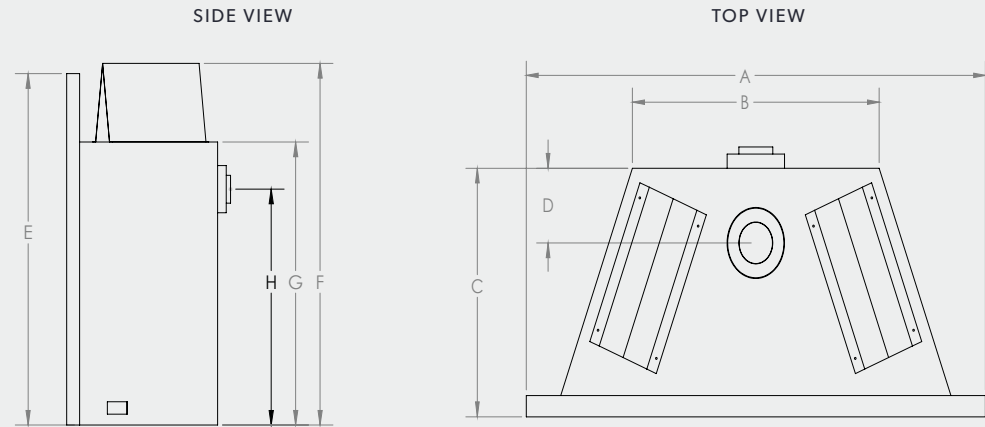

3400 DVTR20N (TOP & REAR VENT)


A	B	C	D
34-5/8"	23-1/2"	15-3/4"	6-3/4"
864mm	584mm	381mm	152mm
E	F	G	H
29"	30"	27-1/2"	20-1/2"
737mm	762mm	686mm	508 mm

3400 DVTR20N

A	B	C	D
*39-1/2"	28"	34-3/4"	46.75"
991mm	711mm	864mm	1187mm

*This measurement allows for 6" sidewall clearance on sides of unit (required).

CORNER FRAMING

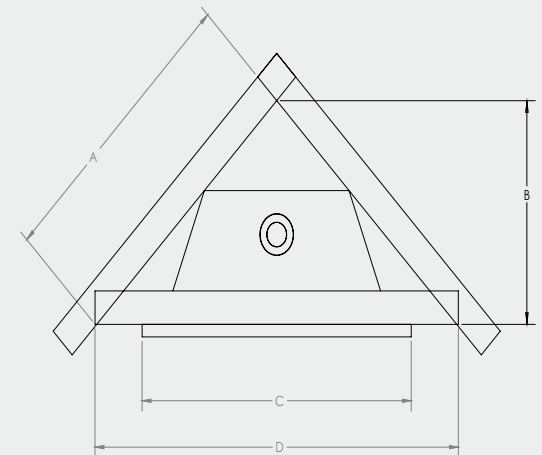

Tested and Approved to North America Standards ANSI Z21.88B-2014/CSA 2.33-2014 and CAN/ CGA-2.17-M91